


Continuous Hinges

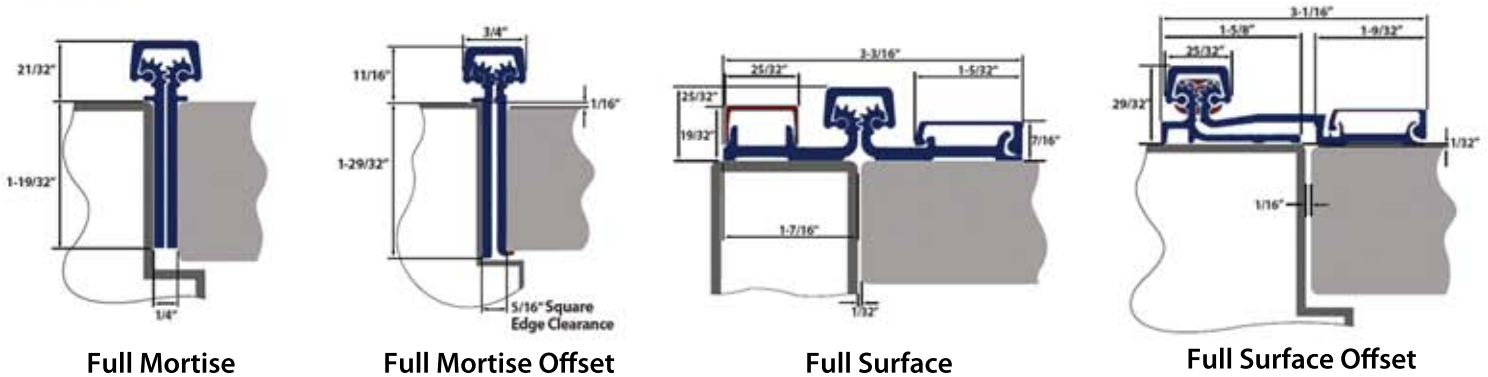

Base Material : 6063 T6 Aluminum Alloy

Types : Full Mortise and Full Surface

Handing : Non Handed (unless cut in the field)

Stock Lengths : 83" and 95"

Stock Finishes : AL = Aluminum Anodized and BZ = Dark Bronze Anodized
Anodizing is done after machining to help reduce wear

Templating : Templated hole patterns

Fasteners : 12-24 x 7/8" Self tapping machine screws

- Features :**
- 32 Self lubricating concealed bearings per hinge for heavy duty applications
 - Eliminates door sag and binding
 - Adds higher degree of security over standard hinges
 - Low operating force helps opening to meet ADA
 - Adds reinforcement to both door and frame

Warranty : 10 Year

RETRO - Continuous Hinge

- Features :**
- Adjustable mounting slots allow for a custom fit every time
 - Wide hinge barrel conceals existing hinge pockets for a clean installation
 - Frame leaf is 1/8" longer than door leaf to establish correct clearances every time

Templating : Special screw hole mounting pattern is designed to avoid SDI location hinge reinforcements in the frame

Stock Lengths : 79", 83" and 95"

Stock Finish : AL = Aluminum Anodized

